

Touch Dimmer Switch

Function:


- Finger touch for turn on and turn off the light. Touch over 0.3sec can dim the lighter (only for Dimmer Switch)
- Provide one independent electrical circuit
- Each Gang can be controlled by IR which also can be stored and learned 10 sets of IR code
- Halogen or Tungsten Lighter only

Features:

- IR remote control.
- Dimmer function.
- Electronic protective system.
- Finger touch ON/OFF function and without metal contact.
- Easy to be installed and fit the wall box.
- Printing pattern could be designed by customer.
- Beautiful Outer Shell was designed by DesignNord in Denmark.
- This product will be controlled by TS-TT01 remote controller which can remote 4 channels in one direction. It is means you can create a cosy charming atmosphere by your mind.



TS-TI01 / TS-TIA01
(1 Gang)

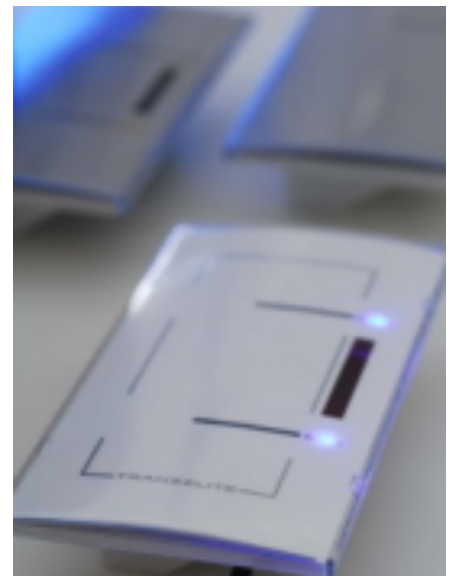

TS-TI02 / TS-TIA02
(2 Gang)

IR In-Wall Touch Switch

Specification

Model	TS-TI01	TS-TI02	TS-TIA01	TS-TIA02
Power Supply	AC100~120V / 200~240V; 50 / 60 HZ			
Load	600W		100W	
Power Consumption	50mA			
Distance	within 8 meters			
Gang	1	2	1	2
Wiring	1 IN / 1 OUT	1 IN / 2 OUT	1 IN / 1 OUT	1 IN / 2 OUT
Installation Location	wall switch box			
Dimmer Range	-		14 segments; 10%~95%	
Dimension	72 x 120 x 12mm (outside of wall)			
Operating Temperature	-5°C~45°C ; 23°F~113°F			
Relative Humidity	Under 90%			
Notes	1. Avoid humidity 2. Suggest to be installed by professionals			